



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	50	Hz
Speed	n	1375	RPM
Power consumption	P _e	140	W
Nominal current	I _{nom}	0.6	A
Maximum current	I _{max}	0.8	A
Capacitor		3.5/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class Fan		IP55	
Sound pressure level (2 m)	L _{p (meas.)}	62	dB(A)
Sound pressure level (7 m)	L _{p (calc.)}	51	dB(A)
Packing dimensions		510x510x315	mm

Fan details


Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options


Triac controller	Yes
Transformer	Yes
Intelligent Fan Drive	Yes
RFREINV7 control	Yes

* This fan is suitable for 1~ frequency control with the Inverter Optidrive type RFREINV7. This Inverter Optidrive RFREINV7 is equipped with a special Vostermans Ventilation BV parameter set. This Inverter Optidrive RFREINV7 is available from Vostermans Ventilation BV.

Characteristics

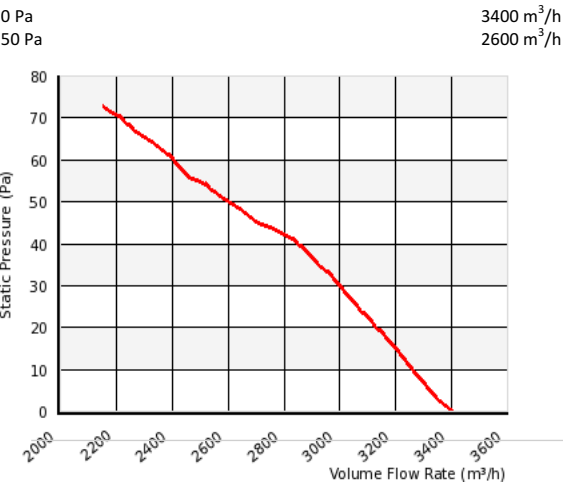

Dimensions

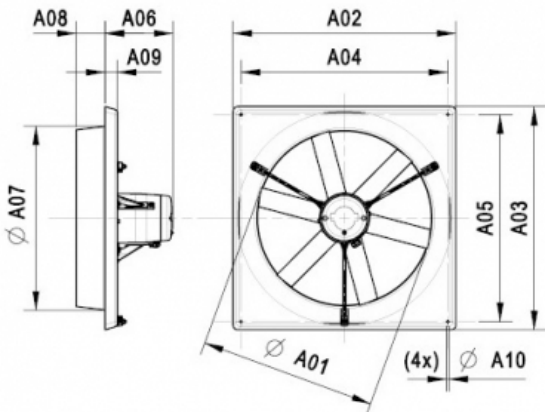

A01:	362 mm
A02:	493 mm
A03:	493 mm
A04:	445 mm
A05:	445 mm
A06:	192 mm
A07:	390 mm
A08:	84 mm
A09:	36 mm
A10:	8 mm




Please note: Picture may deviate from original product

Approval(s)



Wiring diagram - Fan

AA01 - 1 Phase - Standard - CCW

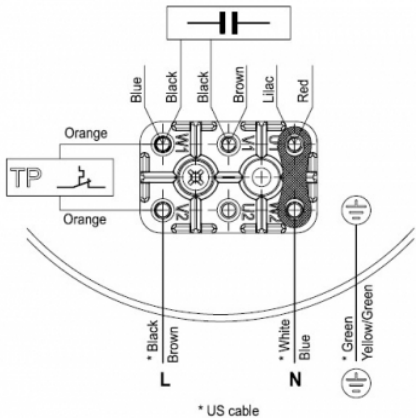

VOSTERMANS
VENTILATION

Vostermans Ventilation B.V.
Venlo - The Netherlands
+31 (0)77 389 32 32
ventilation@vostermans.com

Vostermans Ventilation Inc.
Bloomington, IL - U.S.A.
+1 309 827 9798
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.
Shanghai - China
+86 21 5290 2889/2899
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.
Tmn Klang Jaya - Malaysia
+60 (0)33324 3638
ventilation@vostermansasia.com