



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	50	Hz
Speed	n	1415	RPM
Power consumption	P _e	200	W
Nominal current	I _{nom}	0.9	A
Maximum current	I _{max}	1.6	A
Cos φ		0.94	
Capacitor		3.5/450	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _p (meas.)	65	dB(A)
Sound pressure level (7 m)	L _p (calc.)	54	dB(A)
Packing dimensions		510x510x315	mm

Fan details


Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

0 Pa 4900 m³/h
50 Pa 4100 m³/h

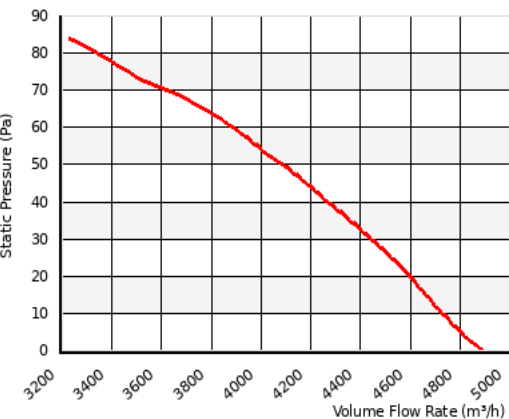


Please note: Picture may deviate from original product

Approval(s)



Wiring diagram

BA01 - 1 Phase - Standard - CCW

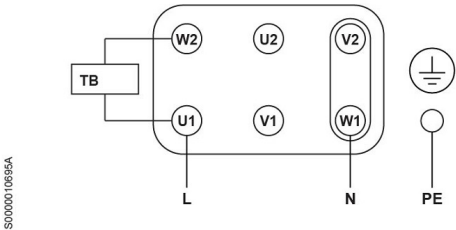

Dimensions

