



Technical data

Voltage	U	230	V
Phase		1	~
Frequency	f	50	Hz
Speed	n	935	RPM
Power consumption	P _e	500	W
Nominal current	I _{nom}	2.2	A
Maximum current	I _{max}	3.4	A
Cos φ		0.98	
Capacitor		16/400	μF/V
Ambient temperature	T _{amb min/max}	-25...40	°C
Insulation Class		CL.F	
IP Class		IP55	
Sound pressure level (2 m)	L _{p (meas.)}	69	dB(A)
Sound pressure level (7 m)	L _{p (calc.)}	58	dB(A)
Weight		19.4	kg
Packing dimensions		720x720x400	mm


Fan details

Impeller blades	5
Impeller type	5
Impeller system	G
Impeller material	PG

Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No

Characteristics

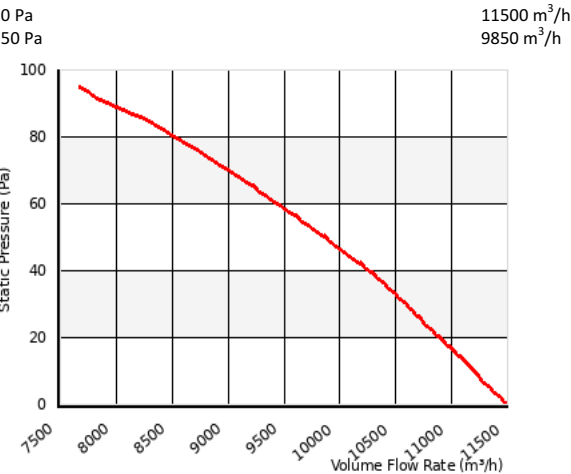


Please note: Picture may deviate from original product

Approval(s)



Wiring diagram

BA01 - 1 Phase - Standard - CCW

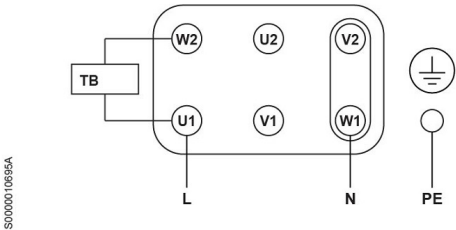

Dimensions

