



Technical data

|                             |                          |             |       |
|-----------------------------|--------------------------|-------------|-------|
| Voltage                     | U                        | 230         | V     |
| Phase                       |                          | 1           | ~     |
| Frequency                   |                          | 50          | Hz    |
| Speed                       |                          | 1430        | RPM   |
| Power consumption           | P <sub>e</sub>           | 220         | W     |
| Nominal current             | I                        | 1           | A     |
| Maximum current             | I                        | 1.7         | A     |
| Capacitor                   |                          | 04/400      | μF    |
| Ambient temperature         | T <sub>amb min/max</sub> | -25...40    | °C    |
| Insulation Class            |                          | CL.F        |       |
| IP Class Fan                |                          | IP55        |       |
| Sound pressure level at 2 m | L <sub>p</sub>           | 65          | dB(A) |
| Weight                      |                          | 11.2        | kg    |
| Packing dimensions          |                          | 560x560x315 | mm    |

Fan details


|                   |    |
|-------------------|----|
| Impeller blades   | 6  |
| Impeller type     | 3  |
| Impeller system   | C  |
| Impeller material | PP |

Control options

|                       |     |
|-----------------------|-----|
| Triac controller      | Yes |
| Transformer           | Yes |
| Frequency drive       | No  |
| Intelligent Fan Drive | Yes |

Characteristics

0 Pa 5050 m<sup>3</sup>/h  
50 Pa 4300 m<sup>3</sup>/h

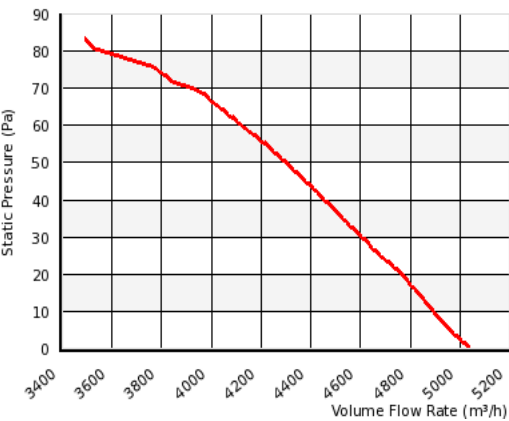


Please note: Picture may deviate from original product

Approval(s)




Wiring diagram - Fan

AA01 - 1 Phase - Standard - CCW

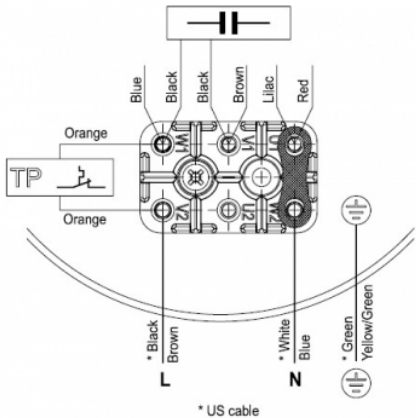

Dimensions

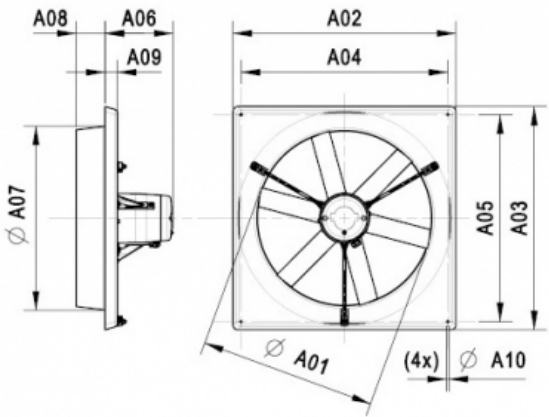

|      |        |
|------|--------|
| A01: | 415 mm |
| A02: | 543 mm |
| A03: | 543 mm |
| A04: | 495 mm |
| A05: | 495 mm |
| A06: | 192 mm |
| A07: | 440 mm |
| A08: | 84 mm  |
| A09: | 36 mm  |
| A10: | 8 mm   |



**VOSTERMANS**  
VENTILATION

Vostermans Ventilation B.V.  
Venlo - The Netherlands  
+31 (0)77 389 32 32  
ventilation@vostermans.com

Vostermans Ventilation Inc.  
Bloomington, IL - U.S.A.  
+86 21 5290 2889/2899  
ventilation@vostermansusa.com

Vostermans Ventilation Ltd. Co.  
Shanghai - China  
+86 21 5290 2889/2899  
ventilation@vostermanschina.com

Vostermans Ventilation Sdn. Bhd.  
Tmn Klang Jaya - Malaysia  
+60 (0)33324 3638  
ventilation@vostermansasia.com